










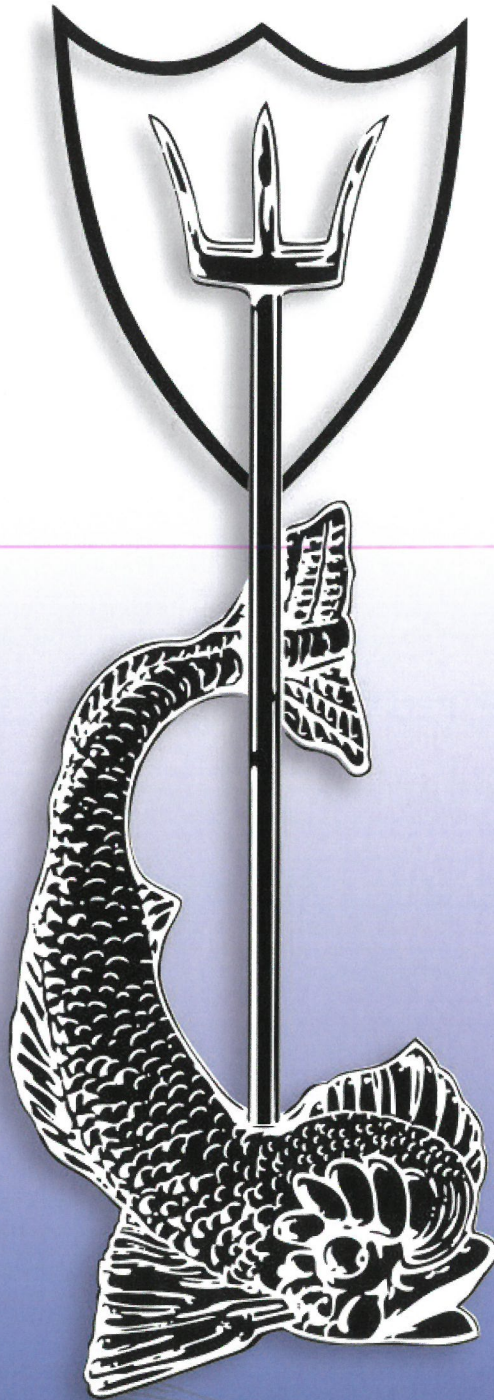



















TRIDENT MARINE®




















INTERNATIONAL HOSE CATALOG

PART# - NAME - CERTIFICATIONS WARRANTY - COLOR - FEATURE	DESCRIPTION	I.D. SIZE		PACKAGING
		INCH	mm	
<b>329 TRIDENT A2 CORRUGATED FUEL FILL</b> USCG • ISO • SAE • NMMA • LLOYD'S • CE  5 YEAR WARRANTY • BLACK WITH RED STRIPE	Trident Corrugated A2 Marine Fuel Hose (Fill and Vent plus Diesel Distribution) meets newest ABYC H-24 and H-33, SAE J1527, SAE J30R6, ISO 7840 A2, USCG Type A2; and is NMMA Type Accepted, CE Certified and Lloyds Approved, for all marine fuels including gasoline, alcohol blends, diesel and bio-diesel. Built with thick wall, corrugated cover and wire helix between 2 ply reinforcement for extra service life and bend-ability. Formulated for Max resistance to fuels, fire, heat, cold, ozone, aging and permeation.	1-1/2" 2" 2-3/8"	38mm to 51mm	Coils: 25' (7.6m) 50' (15m) Length: 12.5' (3.8m) Boxed on request up to 1.5" (38mm)
<b>327/328 TRIDENT A2 CORRUGATED FUEL LINE &amp; FILL</b> USCG • ISO • SAE • NMMA • LLOYD'S • CE  5 YEAR WARRANTY • BLACK WITH RED STRIPE	Trident A2 Marine Fuel Hose (Fill and Vent plus Diesel Distribution) meets newest ABYC H-24 and H-33, SAE J1527, SAE J30R6, ISO 7840 A2, USCG Type A2; and is NMMA Type Accepted, CE Certified and Lloyds Approved, for all marine fuels including gasoline, alcohol blends, diesel and bio-diesel. Built with thick wall, smooth cover and wire helix between 2 ply reinforcement for extra service life and bend-ability. Formulated for Max resistance to fuels, fire, heat, cold, ozone, aging and permeation. #328 Series is same as #327, but without wire helix.	#327: 3/4" to 2-3/8" — #328 1-1/2" & 2"	19mm to 60mm	Coils: 25' (7.6m) 50' (15m) Length: 12.5' (3.8m) Boxed on request up to 1.5" (38mm)
<b>365 TRIDENT A1-15 FUEL LINE</b> USCG • ISO • SAE • NMMA • ABYC • CE • EPA • CARB  5 YEAR WARRANTY • BLACK	Trident Barrier Lined "Low Perm" A1-15 Marine Fuel Hose (Distribution, Return, Vent and Transfer) for all marine fuels including gasoline, alcohol blends (CE-10), diesel and bio-diesel. Meets newest ABYC H-24 and H-33, SAE J1527, CARB and EPA "A1-15" and USCG Type A1, ISO 7840 A1 standards and requirements, and is NMMA Type Accepted and CE Certified. Built with 2 spiral reinforcement and unique "Perm Barrier Liner" on inside surface of tube. Formulated for Max resistance to fuels, fire, heat, cold, ozone, aging and permeation. New EPA Certified and CARB Compliant.	1/4" to 3/4"	6.3mm to 19mm	Reels: 250' (76m) Boxed: 25' (7.6m) 50' (15m) 100' (30.5m)
<b>319 TRIDENT A1-15 FUEL LINE</b> USCG • ISO • SAE • NMMA • ABYC • CE • EPA • CARB  5 YEAR WARRANTY • BLACK	Trident Barrier Lined "Low Perm" A1-15 Marine Fuel Hose (Distribution, Return, Vent and Transfer) for all marine fuels including gasoline, alcohol blends (CE-10), diesel and bio-diesel. Meets newest ABYC H-24 and H-33, SAE J1527, CARB and EPA "A1-15" and USCG Type A1, ISO 7840 A1 standard and requirements, and is NMMA Type Accepted and CE Certified. Built with 2 spiral reinforcement and unique "Perm Barrier Liner" between tube and reinforcement. Formulated for Max resistance to fuels, fire, heat, cold, ozone, aging and permeation. EPA Certified and CARB Compliant.	1/4" to 5/8"	6.3mm to 19mm	Reels: 250' (76m) Boxed: 25' (7.6m) 50' (15m) 100' (30.5m)
<b>317 TRIDENT A2 FUEL VENT</b> USCG • ISO • SAE • NMMA • ABYC • CE  5 YEAR WARRANTY • BLACK	Trident New type A2 Marine Fuel Hose (for Vent and Diesel Distribution) for all marine fuels including gasoline, alcohol blends, diesel and bio-diesel. Meets newest ABYC H-24 and H-33, SAE J1527, USCG Type A2, ISO 7840-A2 Standards; and is NMMA Type Accepted and CE Certified. Built with 2 spiral reinforcements and formulated for Max A2 resistance to fuels, fire, heat, cold, ozone, aging and permeation.	5/8"	16mm	Reels: 250' (76m) Boxed: 25' (7.6m) 50' (15m) 100' (30.5m)
<b>305 TRIDENT B1-15 OUTBOARD FUEL LINE</b> USCG • SAE • NMMA • ABYC • CE • EPA • CARB  3 YEAR WARRANTY • LIGHT GREY	Trident Barrier Lined "Low Perm" B1-15 Marine Outboard Rubber Fuel Line Hose for all marine fuels including gasoline, alcohol blends (CE-10), diesel and bio-diesel. Meets newest ABYC H-24, SAE J1527, USCG, ISO 8469, CARB and EPA standards; and NMMA Type Accepted, CE Certified and EPA Certified. Built with 2 spiral reinforcement, New Ultra Low Perm Barrier Liner, and Light Grey CPE Cover. Formulated for Max resistance to fuels, heat, cold, ozone, abrasion, aging and permeation. New EPA Certificate of Conformity and CARB Executive Order.	1/4" to 3/8"	6.3mm to 9.5mm	Coils: 100' (30.5m) Boxed: 25' (7.6m) 50' (15m) 100' (30.5m)
<b>321 TRIDENT OCEAN FLEX MULTI-PURPOSE MARINE HOSE - FUEL/WET EXHAUST/WATER</b>  5 YEAR WARRANTY • BLACK W/RED & WHITE STRIPE + BLUE LETTERING	This unique marine hose can be used for a multitude of applications for both Commercial and Recreational Vessels including: Fuel Fill, Feed, and Vent (Diesel & Gasoline – Type A1), Lube Oil, Wet Exhaust, Water (Vital and Non-Vital), Bilge, Coolant, Drains, and Sanitation applications. 2 ply reinforcement with wire helix provides excellent flexibility and bend radius. OCEAN-FLEX boasts compliance with the following standards: USCG Inspected Vessels (Title 46 CFR Sub-Chap. T), SAE J1942 (Code F, VW, NWW), USCG Type A1, SAE J1527 A1 R2, SAE J2006 R2, SAE J20R2 B, SAE J20R4 B, SAE J20R5 B, SAE J30R5, ABYC H-22, H-24, H-33 P-1, P-4, ISO 7840 A1, ISO 8469 B1, and ISO 13363 2B, CE, NMMA.	1/2" to 8"	12.7mm to 203mm	Coils: 25' (7.6m) 50' (15m) Lengths: 12.5' (3.8m)
<b>221FR PARKER COMMERCIAL FUEL HOSE &amp; FITTINGS</b> USCG A1 • SAE J1942 • ISO • CE  7 YEAR WARRANTY • BLUE	Type A1 Marine Fuel Hose for Commercial, Inspected & Recreational Vessels (Distribution, Return, Vent & Transfer) for gasoline, alcohol blends & diesel. Exceeds all USCG, SAE J1942 & 1527 A1, ABYC H24 & H33 Standards; CE Certified; Type Approved by NMMA, Lloyd's, DNV & ABS. Reinforced with 1 braid high tensile steel wire, blue (wipe clean) rubber cover & 2000psi burst pressure. Excellent flexibility. Resistant to all fuels, oil, weather, aging, abrasion, fire, heat, cold & ozone. Required on passenger vessels of 6 passengers or more. Uses Parker (Brass, Steel & Stainless Steel) reusable & crimp on fittings. Assembly and crimping equipment available.	1/4" 5/16" 13/32" 1/2" 5/8" 7/8"	6.3mm 7.8mm 10mm 13mm 16mm 21mm	Boxed: 50' (15m) Bulk Reels: 350' to 150' (107m to 46m)

PART# - NAME - CERTIFICATIONS WARRANTY - COLOR - FEATURE	DESCRIPTION	I.D. SIZE		PACKAGING
		INCH	mm	
<b>252F TRIDENT EXTRA FLEXIBLE CORR MARINE WET EXHAUST HOSE</b> SAE J2006 • LLOYD'S  5 YEAR WARRANTY • BLACK W/BUE, YELLOW & WHITE STRIPE	Trident Extra Flexible Corrugated marine wet exhaust hose made for tight bends. Soft thick rubber tube and cover with wire helix between 2 ply reinforcement. Engineered to be extremely flexible and to have a tight bend radius. Resists heat, ozone, exhaust fumes, panting and collapse. Exceeds (SAE J2006 – R2, and ABYC & NMMA P-1 exhaust standards). Lloyd's Registry Type Approved Cert 02/00029. Black High Temp EPDM Rubber 250°F (121°C) Max. continuous	1-1/2" to 8"	38mm to 203mm	I.D. ALL Lengths 6.25'-12.5' (1.9 - 3.8m) Coils: 25' (7.6m) 1" - 4" (25.4 - 102mm) Coils 50' (15m)
<b>252 TRIDENT CORR MARINE WET EXHAUST HOSE</b> SAE J2006 • LLOYD'S  5 YEAR WARRANTY • BLACK WITH BLUE STRIPE	Trident corrugated marine wet exhaust hose for longer connections with substantial bends. Thick tube and cover with wire helix between 2 ply reinforcement. Exceptional flexibility and bend radius. Resists heat, ozone, exhaust fumes, panting and collapse. Exceeds (SAE J2006- R2, and ABYC & NMMA P-1 exhaust standards). Lloyd's Registry Type Approved Cert. 02/00029. Black High Temp EPDM Rubber 250°F (121°C) Max.**	1-1/2" to 8"	38mm to 203mm	I.D. ALL Lengths 6.25'-12.5' (1.9 - 3.8m) Coils: 25' (7.6m) 1" - 4" (25.4 - 102mm) Coils 50' (15m)
<b>250/100 TRIDENT FLEX MARINE WET EXHAUST &amp; WATER</b> SAE J2006 • LLOYD'S  5 YEAR WARRANTY • BLACK WITH BLUE STRIPE	Trident Flex wet exhaust hose for longer bent connections. In smaller I.D.'s for engine intake, critical water, drain, scupper bilge & sanitation uses. Extra heavy tube and cover with wire helix between 2 ply reinforcement provides excellent flexibility and bend radius. Resists heat, ozone, exhaust, sani chemicals, panting and collapse. Exceeds (SAE J2006-R2, and ABYC & NMMA P-1 exhaust standards). Lloyd's Registry Type Approved Cert. 02/00029. Black High Temp EPDM Rubber 250°F (121°C) Max.**	1/2" to 8"	13mm to 203mm	I.D. ALL Lengths: 10' - 12.5' 25' - 50' (3m-3.8m-7.6m-15m) 1/2" - 4" (13 - 102mm) Coils 50' (15m)
<b>200/110 TRIDENT PLY MARINE WET EXHAUST &amp; WATER</b> SAE J2006 • LLOYD'S  5 YEAR WARRANTY • BLACK W/BUE STRIPE	Trident Ply marine wet exhaust hose for short, straight connections. In smaller I.D.'s for critical engine coolant & circulation, heat exchanger and discharge uses. Extra heavy tube and cover with 2 to 6 ply reinforcement resists heat, aging, ozone, exhaust and sani chemicals. Exceeds (SAE J2006-R1, and ABYC & NMMA P-1 exhaust standards). Lloyd's Registry Type Approved Cert. 02/00029. Black High Temp EPDM Rubber 250°F (121°C) Max.**	1/2" to 12"	13mm to 305mm	I.D. ALL Lengths: 10' - 12.5' (3m - 3.8m) 1/2" - 2-1/2" (13 - 63.5mm) Coils: 50' (15m)
<b>252V TRIDENT BLUE CORRA-SIL MARINE WET EXHAUST &amp; WATER</b> SAE • ISO • LLOYD'S  10 YEAR WARRANTY • GLOSSY BLUE W/ RED TUBE	Trident Blue Corra-sil Corrugated Silicone Marine Wet Exhaust & Water Coolant Hose is the ultimate in flexible exhaust quality with "Real Hot" VHT performance, extra long service life and excellent long length bendability. Exceeds SAE J2006-R2, ISO 13363-2B, and ABYC, & NMMA P-1 exhaust standards and black rubber exhaust features and is Lloyd's Approved. Built with extra thick wall, glossy blue corrugated cover, smooth red tube, wire helix between 2 ply polyester reinforcement and 350°F (177°C) Max. Perfect for long, bent wet exhaust (genset and engine) runs and premium raw water and coolant hose runs. See Marine Wet Exhaust Systems Catalog.**	3/4" to 8"	19mm to 203mm	I.D. ALL Lengths 3' - 6' - 12' (0.9-1.8 - 3.7m) 3/4" - 3" (19 - 76mm) 60' (18.3m) up to 4" LENGTHS DIVISIBLE BY 3
<b>202X/202V TRIDENT SILICONE MARINE WET EXHAUST &amp; WATER</b> SAE • ISO • LLOYD'S  10 YEAR WARRANTY #202X BRICK RED • #202V GLOSSY BLUE W/ RED TUBE	Trident Silicone Marine Wet Exhaust & Water-Coolant Hose is the ultimate in extra thick soft wall silicone quality with very high temp. performance and extra long service life. Exceeds SAE J2006-R1, ISO 13363-1B, Lloyd's Registry Type Approved, and ABYC & NMMA P-1 exhaust standards. #202V Glossy Blue "Very Hi Temp" has 4-6 ply polyester reinforcement and 350°F (177°C) Max. #202X Glossy Red "Xtra Hi Temp" has 4 ply Nomex® reinforcement, and 500°F (260°C) Max. Used world wide on premium boats, yachts and special service vessels. It has become the super yacht standard. See Trident Marine Wet Exhaust System Catalog.**	1" to 18"	25.4mm to 457mm	I.D. ALL Lengths: 3' - 6' - 12' (0.9-1.8 - 3.7m)
<b>TRIDENT SILICONE &amp; RUBBER WET EXHAUST ELBOWS &amp; BELOWS</b> SAE J2006  5-10 YR WRNTY • BLACK (EDPM), BLUE OR BRICK RED	Trident Silicone & Rubber Elbows & Hump Hose Bellows provide the ultimate flexible connectors for Marine Wet Exhaust Systems. They offer much greater tolerance to heat, misalignment, engine movement & vibration, with significant savings in cost, parts, labor and space. Highest max. continuous operating temps - Molded Black Hi Temp EPDM Rubber 280°F (138°C), Blue Very Hi Temp. Silicone 350°F (177°C), Red Xtra Hi Temp. Silicone 500°F (260°C). Silicone (Blue and Red), also available w/ 4 to 6 ply reinforcement. All exceed (SAE J2006-R3, and ABYC & NMMA P1) Std. See Marine Wet Exhaust Systems Catalog.**	1-1/2" to 18"	38mm to 457mm	Bulk or boxed with 4 Stainless Steel T-bolt Clamps
<b>130/131V TRIDENT SILICONE &amp; RUBBER HEATER HOSE</b> SAE J20R3  2-7 YEAR WARRANTY 130 BLACK • 131V - BLUE COVER, RED TUBE	#130 (Standard Black) 50 PSI (0.34 Mpa) W.P. 212°F (100° C) SAE J20R3. 2 Year Warranty.  131V Ultimate Silicone heater hose - Very Hi Temp Blue with Red Tube provides much greater Temp. range and service life than standard EPDM rubber #130 Heater Hose. Both are 2 spiral polyester reinforced with similar working pressure for engine coolant water, A/C and other mid-press water applications. 131V (VHT-Blue), 45 to 75 PSI (0.31 to 0.52 Mpa) WP 350°F (177°C) SAE J20R3, Class 1 & J20 P3. 7 Year Warranty.	130: 1/2" to 3/4"  131V: 1/4" to 1"	130: 13 to 19mm  131V: 6.3 to 25mm	Coils: 175' - 300' (53 - 90m) Boxed: 25' - 50' (7.6m - 15m) Reels: 250' (76m) Boxed: 50' (15m)
<b>132/134 H.D. &amp; X.H.D. WATER / AIR HOSE</b> SAE J20R3  2-3 YEAR WARRANTY • BLACK	Cost effective, Hi Temp, EPDM rubber, polyester reinforced and exceeds SAE J20R3. Both are resistant to coolants, ozone, cold & heat; and serve a variety of boat and plant pressurized application (water & air delivery) #132 is 2 spiral, 200PSI (1.38Mpa) W.P. #134 has 4 spiral, heavy wall and better bend radius and working pressure. 300 PSI (2.1Mpa) W.P. Operating Temp. -40°F to 212°F (-40°C to 100°C) #134 serves below water line intake and discharge applications (A/C, Eng, Sani) etc.	1/4" to 1-1/2"	6.3mm	Reels: 750'-250' (230 - 75m) Boxed: 50' (15m)

PART# - NAME - CERTIFICATIONS WARRANTY - COLOR - FEATURE	DESCRIPTION	I.D. SIZE		PACKAGING
		INCH	mm	
<b>102/101 TRIDENT SANI SHIELD SANITATION HOSE</b>  <b>HEAVY WALL</b> 10 YEAR WARRANTY #102 WHITE W/ GREEN STRIPE • #101 BLACK W/ GREEN STRIPE	Premium Sanitation Hose for all head & holding tank connections. Extra thick tube & cover is specially formulated Black or White EPDM Rubber for Max. Resistance to Odor Permeation and winterizing with antifreeze. With wire helix between 2 ply reinforcement this hose has excellent bend radius, flexibility, and fitting acceptance and retention. This makes for easy installations with no heat gun or lubricant necessary. It's Legendary odor-free performance is the best on the market. Self draining installations still recommended. Not for potable water.	White 1-1/2" 2" Black 1" 1-1/2" 1-7/8"	25.4mm 38mm 48mm	Coils: 25' (7.6m) 50' (15m)  Length: 12.5' (3.8m)
<b>148 TRIDENT VAC X.H.D. SANITATION HOSE - FDA</b>  3 YEAR WARRANTY • WHITE	Extra heavy duty sanitation hose of smooth white vinyl. Specially compounded to provide resistance to odor permeation and (FDA) potable water fill. Also for critical bilge, drain scupper, live well, etc. Hard PVC helix gives good flexibility and bend radius. No cuffs required. * Don't use with alcohols, anti freeze, petro-chemicals or solvents. Self draining installations are necessary for odor free service. To be used in open ended pressurized, suction, and discharge applications at ambient temperatures. +10° to +120° F (-12° to +49°C). CA prop 65 Compliant.	5/8" to 2"	16mm to 51mm	Coils: 100' (30.5m)  Boxed: 25' (7.6m) 50' (15m)
<b>150 TRIDENT CLEAR PVC TUBING - FDA</b>  2 YEAR WARRANTY • CLEAR PVC	Non-toxic FDA compounded PVC for many unpressurized, cool water uses like fresh water, drain and vent lines. Operating temperatures +20° to +150° F (-7° to +66°C). NOT RECOMMENDED FOR BELOW WATERLINE THRU-HULL CONNECTIONS. CA prop 65 Compliant.	1/4" to 1-1/2"	6.3mm to 38mm	Coils: 250' to 1" (76-25m) 100' to 1-1/2" (30.5m-38mm) Boxed: 25' (7.6m) 50' (15m) 100' (30.5m)
<b>164/162 TRIDENT REINFORCED PVC - FDA</b>  2 YEAR WARRANTY • #164 WHITE W/ BLUE TRACER • #162 CLEAR W/ BLUE & RED TRACER	Nylon reinforced. FDA compounded PVC for pressurized drinking water systems, etc. No taste or odor. #164 "Cold Water". Max W.P. depending on I.D. size @ 70°F (21°C): #162=175 PSI (1.21Mpa), Operating temperatures +20° to +150° F (-7° to +66°C). NOT RECOMMENDED FOR BELOW WATERLINE THRU-HULL CONNECTIONS. CA prop 65 Compliant.	3/8" to 1"	9.5mm to 25.4mm	Coils: 250' (76m)  Boxed: 25' (7.6m) 50' (15m)
<b>165/166 TRIDENT REINFORCED PVC - FDA</b>  3 YEAR WARRANTY • #165 - TRANSLUCENT BLUE #166 - TRANSLUCENT RED	Nylon reinforced. FDA compounded PVC for pressurized drinking water systems, etc. No taste or odor. #165 "Cold Water". Max W.P. depending on I.D. size @70°F (21°C): #165 = 175 PSI (1.21Mpa), #166 = 150 PSI (1.03 Mpa). Operating temperatures +20° to 150° F (-7° to +66°C). NOT RECOMMENDED FOR BELOW WATERLINE THRU-HULL CONNECTIONS. CA prop 65 Compliant.	3/8" to 1"	9.5mm to 25.4mm	Coils: 250' (76m)  Boxed: 25' (7.6m) 50' (15m)
<b>161 TRIDENT HD w/ NYLON REINFORCEMENT PVC - FDA</b>  3 YEAR WARRANTY • CLEAR W/NYLON REINFORCEMENT	Heavy duty non-toxic FDA compounded PVC with nylon reinforcement. For pressurized drinking water systems and many other uses. Resists odor, taste and up to 250 PSI/WP (depending on I.D. size) @ 70°F (21°C). For cold and hot tap water. Operating temperatures +20° to +150°F. (-7° to +66°C) Good flexibility and bend radius.* CA prop 65 Compliant.	1/4" to 1-1/2"	6.3mm to 38mm	Coils: 100' to 1-1/2" (30.5m-38mm) 250' to 1" (76m-25mm)  Boxed: 50' (15m)
<b>163 TRIDENT CLEAR W/ WIRE HELIX PVC HOSE - FDA</b>  3 YEAR WARRANTY • CLEAR W/ WIRE HELIX	Premium Clear FDA grade PVC hose with galvanized steel helix provides excellent flexibility and bend radius. It has a smooth outer surface to allow for easy clamping. Liquid suction lines, Air & Water Supply, Food and Beverage Supply, Vacuum Pumps, Bilge, Live Well, Drain, and Potable Water for unpressurized systems. Temperature Range: -5°F to 150°F (-20°C to 65°C).	1/2" to 1-1/2"	13mm to 38mm	Coils: 100' (30.5m)  Boxed: 25' (7.6m) 50' (15m)
<b>160 TRIDENT SUCTION AND PRESSURE HOSE (FDA)</b>  <b>NEW</b> 3 YEAR WARRANTY • CLEAR W/ WIRE & REINFORCEMENT	Premium Clear FDA grade PVC hose with galvanized steel helix and high tensile synthetic textile reinforcement provides excellent flexibility and bend radius. It has a smooth outer surface to allow for easy clamping. Liquid suction and pressure lines, Air & Water Supply, Food and Beverage Supply, Vacuum Pumps, Bilge, Live Well, Drain, and Potable Water. -5°F to 150°F (-20°C to 65°C).	1/2" to 1-1/4"	13mm to 32mm	Coils: 100' (30.5m)  Boxed: 50' (15m) 100' (30.5m)
<b>146/144 TRIDENT VAC-H.D. WATER FILL &amp; G.P./BILGE &amp; LIVE WELL</b>  2 YR WRNTY • #146 WHITE • #144 CLEAR W/ BLACK HELIX	Corrugated heavy wall vinyl hose with smooth tube. FDA compounds for potable water fill, holding tank pump out, bilge, drain, scupper lines and live well use. Hard PVC helix gives exceptional flexibility & bend radius. NOT RECOMMENDED FOR BELOW WATERLINE THRU-HULL CONNECTIONS. (No cuffs required but may use #143 RHT cuffs on #146 series). To be used on open ended pressurized, suction, and discharge applications at ambient temperatures. +10° to +120°F (-12°C to + 49°C). CA prop 65 Compliant.	5/8" to 1-1/2"	16mm to 38mm	Coils: 100' (30.5m)  Boxed: 50' (15m)

	PART# - NAME - CERTIFICATIONS WARRANTY - COLOR - FEATURE	DESCRIPTION	I.D. SIZE		PACKAGING
			INCH	mm	
BILGE & LIVE WELL & DRAIN	<b>149/147 TRIDENT VAC - X.H.D. BILGE &amp; LIVE WELL HOSE</b>  3 YR WRNTY • #149 BLACK • #147 CLEAR W/ BLACK HELIX	Smooth extra heavy wall vinyl hose. 147 is all clear (FDA) with black helix. Excellent durability, flexibility & bend radius for XHD bilge, live well, drain, scupper lines, etc. No cuffs required. To be used in open ended pressurized, suction, and discharge applications at ambient temperatures. +10° to +120° F (-12° to +49°C). CA prop 65 Compliant. 149-Black-"Extra Flexible"	5/8" to 1-1/2"	16mm to 38mm	Coils: 100' (30.5m)  Boxed: 50' (15m)
	<b>121/120 TRIDENT BILGE HOSE</b>  1 YEAR WARRANTY • #121 BLACK • #120 WHITE	Extremely flexible corrugated polyethylene hose for bilge intake and discharge. Cuffed every foot for clamping. Resists oily bilge and sea water. NOT RECOMMENDED FOR BELOW WATERLINE THRU-HULL CONNECTIONS. Operating temperatures -40° to +200° F (-40° to +93°C).	5/8" to 1-1/2"	16mm to 38mm	Coils: 100' (30.5m)  Boxed: 50' (15m)
CONDUIT	<b>128/128W TRIDENT WIRE HARNESS CONDUIT</b>  1 YR WRNTY • #128 BLACK W/ BLUE STRIPE • #128W WHITE	Corrugated Polypropylene Conduit Hose. Safe and easy to install for multi-wire harness, cable & hose routing, and other applications. ABYC Electrical Standard E-11 applies to all boats with AC or DC systems.  Slit or Unslit. Fire Retardant/Self Extinguishing Polypropylene. Meets UL 94 V-2 as per ABYC E-11.16.4.1.9. 128W-White for easier location of wiring short circuit burn out.	1/4" to 12"	6.3mm to 51mm	Bulk Box: 1000' to 150' (305-46m)  Boxed: 50' (15m)
	<b>129/142 TRIDENT STERN FLEX AND FLANGE</b>  3 YR WRNTY • #129 BLACK • #129W WHITE (NOT SHOWN)	Stern Flex Hose for containment of wire, control cables and hoses between the transom and outboard engine(s). Highly resistance to crushing, abrasion, UV and has a good resistance to chemicals. Extraordinary flexibility. Connects to Trident flange part #142-2000 - BLACK or #142W-2000 - WHITE.	2"	51mm	Coils: 50' (15m)  4' Kit Boxed w/Flange 10' Kit Boxed w/Flange Flanges: Each
VENT DUCT	<b>402/400 TRIDENT PVC VENT DUCT</b>  1 YEAR WARRANTY • #402 BLACK • #400 WHITE	Wire supported vinyl ducting resists weather, sunlight and ozone. Won't support flame. 402/400 - Stand. vent ducting 3 mil. Operating temperatures 0° to +160°F (-18° to +71°C).	3" & 4"	76mm to 102mm	Boxed: 50' (15m)
	<b>481 TRIDENT POLYDUCT</b>  3 YEAR WARRANTY • BLUE	Polyduct – The most flexible, crush proof and rugged blower duct hose for Heat, Ventilation and Air Conditioning (HVAC). Heavy Duty polypropylene hose, reinforced with a flexible polypropylene rod helix. It has excellent flexibility & compressibility; and excellent resistance to crushing, flex fatigue, tearing, and moisture. Stomp on it and it returns to shape without damage. Shove it thru tight openings and overheads and it delivers full air flow. Meets FMVSS 302 flame resistance, Temp. Range: -40°F to +225°F (-40°C to 107°C). *when insulated	3" to 8"	76mm to 203mm	Lengths Boxed: 50' (15m)
A/C DUCT	<b>471 TRIDENT INSULATED AIR CONDITIONING DUCT</b>  2 YEAR WARRANTY • SILVER	Thermo-efficient insulated Heating & A/C Duct. #471 has fiberglass reinforced metalized cover. Rated R-4.2. Operating temperatures (-20° - +250° F) (-29° to +121°C). Meets UL 181, NFPA 90A and 90B.	3" to 8"	102mm to 203mm	Lengths Boxed: 25' (7.6m)
A/C HOSE	<b>169 TRIDENT A/C HOSE</b> 2 YEAR WARRANTY • WHITE 	Smooth white cover reinforced with polyester for chiller and drain lines. Suited for use in air conditioning systems. Temperature Range: -40F to 150°F (-40°C to 65°C).	5/8"	16mm	Coils: 100' (30.5m)  Boxed: 50' (15m)
STEERING	<b>MSH TRIDENT STEERING HOSE</b>  1 YEAR WARRANTY • BLACK	Marine Steering Hose - 1000 PSI Working Pressure - Low Volumetric Expansion. Polymeric core tube, fiber braid reinforcement, abrasion resistant urethane cover. Black, non-perforated cover, all layers bonded for optimum kink resistance & flexibility. -40°F. to +212°F. (-40°C. to +100°C) except limited to +135°F. (+57°C.) for synthetic hydraulic fluids & water based fluids. Uses MS Series Brass Swaged, Crimped On or Reusable Fittings.	5/16" & 3/8"	7.8mm & 9.5mm	Boxed: 50' (15m) 100' (30.5m)  Bulk Reel: 600' (183m)
SPEEDOMETER	<b>151 TRIDENT SPEEDOMETER PITOT TUBING</b>  1 YEAR WARRANTY • BLACK	Black PVC tubing for connection between the speedometer pickup and the gauge. Series 151 has 2-Spiral Polyester Plies reinforcement for high-speed applications and maximum flexibility. Temperature Range: -20°F to 212°F (-28°C to 100°C)	1/8"	3.17mm	Coils: 1200'(365.8m)  Boxed: 25'(7.6m) 100'(30.5m)

	PART# - NAME - CERTIFICATIONS WARRANTY - COLOR - FEATURE	DESCRIPTION	I.D. SIZE		PACKAGING
			INCH	mm	
WASH DOWN	<b>167 COILED WASH DOWN HOSE</b>  3 YEAR WARRANTY • BLACK WITH WHITE STRIPE	Coiled Wash Down Hose is constructed with FDA grade PVC extrusion allowing it to stretch out and automatically coil back into its original form. With heavy-duty wall, it ensures maximum kink resistance and long life. Trident's Coiled Wash Down Hose offers long lasting flexibility and superior abrasion resistance. Complete with solid brass fittings that are built to last without leakage. 3 year warranty.	3/8"	9mm	Lengths: 15' (4m) 25' (7.6m) 50' (15m)
	<b>168W/168Y TRIDENT WASH DOWN HOSE</b>  5 YEAR WARRANTY • #168W WHITE • #168Y YELLOW	Trident Wash Down Hose is constructed with a white FDA grade PVC tube and cover. With heavy-duty 3-ply reinforcement, it ensures maximum kink resistance and long life. Trident Wash Down Hose offers long lasting flexibility and superior abrasion resistance. Fittings are not included. 5 year warranty	5/8" & 3/4"	16mm to 19mm	Lengths: 82' (25m) 164' (50m)
	<b>168 TRIDENT WASH DOWN HOSE</b>  3 YEAR WARRANTY • WHITE WITH BRASS FITTINGS	Wash Down Hose is constructed with an FDA grade vinyl tube and clear vinyl cover. With heavy-duty 2-ply reinforcement, it ensures kink resistance and long life. Trident Wash Down Hose offers long lasting flexibility and superior abrasion resistance. Complete with solid brass fittings that are built to last. This hose is primarily used for dockside wash down and water connections. Temperature Range: -20°F to 150°F (-28.9°C to 65.6°C).	5/8"	16mm	Coils: 25' (7.6m) 50' (15m) 75' (22.8m) 100' (30.5m)
TURBO	<b>TS TURBO/AIR COOLER HOSE</b>  5 YEAR WARRANTY • MATTE BLUE W/ BLACK TUBE	TURBO Silicone is designed to handle the extreme. With 3 and 4 ply reinforcement, a high temp silicone cover and black Fluorosilicone inner tube for best resistance to gases and oil for extended periods. The perfect flexible connection for between the charger and air cooler system. High temp silicone cover with a Fluorosilicone tube Color: Matte blue with black tube.	2" to 4.5"	51mm to 114mm	Lengths: 3' .914m
	<b>720/730 STAINLESS STEEL T-BOLT EXHAUST CLAMPS &amp; CONSTANT TORQUE CLAMPS</b>  SOLID STAINLESS STEEL	Trident T-Bolt Clamps: 3/4" (19mm) Wide, 316 Stainless Steel band & 18-8 Stainless Steel TBolt & Lock Nut (with nylon insert). Very strong and secure for critical applications. Constant Torque Clamps: 304 Stainless Steel 5/8" (16mm) wide band, liner, housing; 18-8 Stainless Steel screw and 301 Stainless Steel Belleville Springs. 7/8" (22mm) OD Range. Automatically expands and contracts to compensate for heat, cold & compression set.	5/8" to 18"	16mm to 457mm	Bulk as Required Box: 10
CLAMPS	<b>705/710 STAINLESS STEEL HD NON-PERF CLAMPS</b>  316 STAINLESS STEEL	Premium Marine Grade, all 316 (high tensile strength) Stainless Steel "HD NON-PERF" Worm Gear Hose Clamp. Band is Non-Perforated and Smooth on the inside w/ Rolled Edges eliminates hose damage with increased clamping force. The Compact, One Piece Housing provides one of the highest clamping force ratings of any worm gear style clamp. Screw Head is 7mm. 705 series: 9.7 mm (0.382") wide band and 14mm (0.55") wide housing. 710 series: 11.7 mm (0.46") wide band and 16mm (0.63") wide housing.	705: 1/4" to 1-1/2"  710: 1/2" to 8"	705: 8 to 56mm  710: 15 to 231mm	Bulk as Required Box: 10
	<b>500/600/700 BRASS HOSE FITTINGS, FERRULES &amp; ADAPTERS</b>  BRASS	Solid brass Standard Hose Fittings, Ferrules & Pipe Adapters stocked in all fuel hose sizes. Crimpers and dies are available. For complete detail, see our retail price list. To be used with 305, 365, 319 and 317 Series Fuel Hoses; and 130, 131V, 132, 134 Series Water Hoses.	See Retail Price List	See Retail Price List	Bulk: 100 Each  Carton: 10 Each



**TRIDENT HOSE CENTERS** with self dispensing reel boxes w/color coded icon labeling  
 Hose dispenses smoothly and tangle-free.  
 • Ask for complete "Hose Center" set-up with heavy duty rack which includes shelves, sign, hose clipper, tape measure, Hose & Application Charts. • Two rack sizes 4' x 6' (1.2m x 1.8m) & 4' x 4 1/2' (1.2m x 1.4m). Planograph assortments from 21 boxes to our 31 BOX "COASTAL" Center.

**1-800-414-BOAT**



585 Plum Run Road  
 Canonsburg, PA 15317  
**Phone:** 1(724) 745-9311  
**Fax:** 1(724) 745-1709  
**Web:** tridentmarine.com  
**Email:** trident@tridentmarine.com